

MX100S Standard Edition

3-in-1 thin client kit for affordable desktop computing

The NComputing MX100S provides a high performance, low cost computing solution for a simple, powerful & affordable desktop computing alternative.

Key Features & Benefits

- Each MX100 kit includes 3 client devices (primary and two satellites)
- Share one computer with up to 45 users
- Powered by Numo SoC
- USB 2.0 keyboard and mouse
- USB 2.0 peripheral support
- Microphone & audio out
- Energy-efficient (typically 2W/user)
- Slash acquisition cost by as much as 65%, maintenance cost by 80% and energy cost by 90%.
- Powerful vSpace® Server desktop virtualization software included
- Easy to set up, maintain, manage and secure
- Compact and reliable (no fans or disks)
- Managed by integrated vSpace management software

As the industry's premier 3-in-1 thin client offering, each MX100S Standard Edition kit works with NComputing's vSpace Server software to deliver a high quality, media-rich Windows desktop experience to 3-users. Architected as an end-to-end solution and built to be simple to deploy, operate and maintain, the hardware, software and protocol components work seamlessly to provide the best user experience. Multiple MX100S Standard Edition kits and a single vSpace Server can deliver Windows desktops for up to 45-users at fraction of the cost of PCs and typical thin-clients. Users don't even know they are sharing a single computer and the whole solution can be managed by users with only basic IT computer skills.

Ideal for workgroup computing, classrooms, computer labs, training rooms, libraries and small business, the MX100S Standard Edition, delivers innovation combined and incredible value to customers with a simple, powerful and highly affordable desktop computing solution.

The MX100S: Standard edition (3-users kit) comes bundled with NComputing vSpace Server licenses.

Multiple MX100S kits can be deployed on an existing LAN infrastructure to deliver Windows desktops to up to 45 users from a single vSpace Server.

Benefit from superior multimedia capabilities, USB peripheral support and the highest number of users per host computer—all at a very affordable price. The economics improve even more with:


- vSpace® Server's ability to deliver Windows desktops to multiple users from a single computer.
- With a single power adapter and network cable for all three, cables are reduced by one-third

MX100 rewrites new affordability standards in shared computing by slashing acquisition cost by as much as 65%, maintenance cost by 80% and energy cost by 90%.



MX100S: Standard edition

Connect to up to 45 users to a single vSpace Server anywhere on LAN.

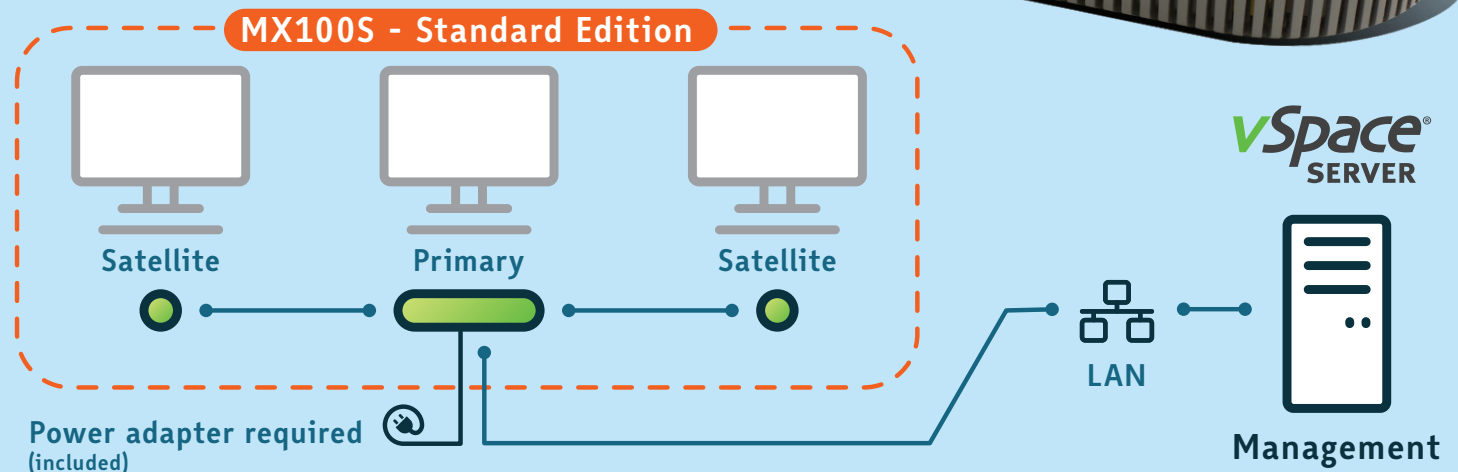

Included:


- 1X primary device
- 2x satellite devices
- Power supply with power cord
- 3x monitor mount brackets
- 2x 6-foot satellite link cables (USB Type-A to USB Type-B)
- Quick install guide
- vSpace Server installation rights.

FEATURES	DESCRIPTION
UP TO 45 USERS PER HOST	Fewer PC's to manage and lower annual operating costs
HIGH QUALITY GRAPHICS	Second generation NUMO SoC device provides full screen video streaming up to 1920x1080 resolution
VSPACE SERVER	Simple to install, easy to configure and fast to set up (complimentary licenses included)
CENTRALIZED MANAGEMENT	Save time deploying and managing multiple vSpace Servers and client devices
SERVICE AND SUPPORT	Provides the resources you need to maximize your technology investment and improve system uptime
SUPPORTED OPERATING SYSTEMS	Microsoft Windows *** — Refer to the support section at ncomputing.com/support for the latest supported versions.
PC HOST REQUIREMENTS	See recommended hardware configuration guide at ncomputing.com/support
MAX USERS PER VSPACE SERVER	45

HARDWARE SPECIFICATIONS	DESCRIPTION
PROCESSOR	Second generation Numo® 2 SoC provides full screen video streaming
SIZE	Primary client 270mm (w) x 80mm (d) x 35mm (h) Satellite client 75mm (w) x 75mm (d) x 25mm (h)
VIDEO RESOLUTION	800x600, 1024x768, 1280x800, 1280x1024, 1360x768, 1440x900, 1920x1080*
AUDIO	16-BIT Stereo DAC via standard 3.5mm speaker port
MICROPHONE	16-BIT MONO microphone audio input via standard 3.5mm microphone port
MOUSE & KEYBOARD	Support for USB 2.0 mouse and keyboard devices (HID devices)
NETWORK	10/100/1000 Mb/s Ethernet speed support (100Mb/s speed or higher preferred)
USB 2.0	Primary client 3 x USB 2.0 ports for peripheral & keyboard/mouse Satellite client 3 x USB 2.0 ports for peripheral & keyboard/mouse
WEIGHT	Primary client 0.24 kg / 0.53 lbs Satellite client 0.06 kg / 0.13 lbs
KIT SHIPPING WEIGHT	1.06KG / 2.34 LBS (includes 3 client devices, power adapter, documentation, 3 VESA mount plates and 2 USB A-B cables)
POWER	Input: 100-240 VAC, 50-60 Hz; Output: 12 VDC, 1.5 A; Nominal power consumption: ~6 W (without peripheral USB devices)
FRONT LED INDICATORS	Primary client Power LED - Blue when power supply is ok LAN LED - Solid blue when connected to LAN; blinking when communicating Satellite client Status LED - Solid blue when connected to primary client
SATELLITE LINK CABLES	USB 2.0 Printer cable between the primary client and each of the satellite clients (2x 2 meter USB A-B cable included)
INTERNAL HW	NComputing Numo2 System-on-Chip; Solid-state design, no moving parts, no fans, no local user storage; Embedded NComputing firmware (no local user OS)
RELIABILITY	Reliability (MTBF) >250,000 hours (calculated using Bellcore Issue 6 TR-332, Case 2, Part I at 40°C)
CERTIFICATIONS	FCC Class A, CE, KCC and RoHS compliant

Connections

1. Headphones (audio-out)
2. USB 2.0
3. Microphone (analog-in)
4. Satellite 3 link
5. Satellite 3 VGA
6. DC Power
7. RJ45 - LAN
8. Primary VGA
9. Primary Keyboard & Mouse
10. Satellite 2 VGA
11. Satellite 2 link
12. Mouse
13. Link to Primary
14. Keyboard



* Fully supported in Q3, 2016

1875 South Grant Street, Suite 570 | San Mateo, CA 94402 | 1.650.409.5959 | info@ncomputing.com | www.ncomputing.com

© Copyright 2017 NComputing Co., Ltd. NComputing® and vSpace® are internationally registered trademarks by NComputing. Copyright © 2003 – 2017. The product could differ from the images shown. The information contained herein is subject to change without notice. Specific features may vary from model to model. The only support and warranties for NComputing products and services are set forth in the express support and warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. NComputing shall not be liable for technical or editorial errors or omissions.